


50/100 Pair Distribution Box

P8750, P8760

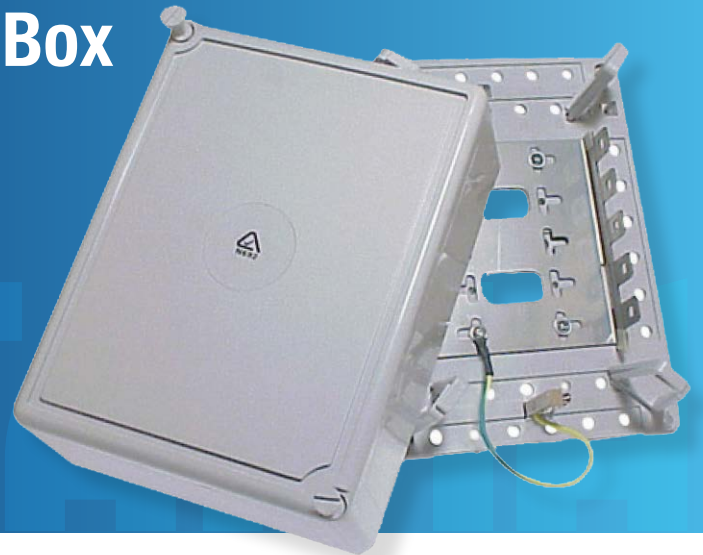

FEATURES

- Grey coloured wall-mounted plastic distribution box containing mounting brackets for 10-pair IDC-type connection modules (available separately).
- Cable entry holes in rear and cable entry cut-outs on all 4 sides.
- Four moveable jumper rings and record-card included.
- Compatible with Commscope HighBand® Cat6A, LSA modules, Telemaster P8710-PRO and all other 10-Pair PROFIL type disconnect modules.

CAT#	CAPACITY	DIMENSIONS
P8750	50 Pair	160W x 210H x 75D mm
P8760	100 Pair	210W x 320H x 125D mm

MECHANICAL PERFORMANCE	
Insertion Force	40 ~ 75N
Pull out force	F ≥ 25N (axial) F ≥ 7.5 N (radial)
IDC life	200 times (20-26 AWG Solid Wire) Minimum
Copper conductor diameter	φ 0.4 ~ φ 0.8 (mm)
Insulation resistance	1000 MΩ minimum
Contact resistance	7 MΩ maximum
Dielectric intensity	AC 1000 Vrms 50Hz or 60Hz in 60s

ENVIRONMENTAL PERFORMANCE	
Storage Temperature	-40°C to 70°C
Operating Temperature	-10°C to 60°C
Relative Humidity	95% non-condensing

MATERIAL SPECIFICATIONS	
Box	ABS
Module	PBT
Contact	Phosphor bronze
Silver plating	0.5μm, 1.25μm, 5μm

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au